

LEAD THRU ELBOWS & SLEEVES

For PN Information See Charts




| Elbows Part No. | Feed Angle | RF Breakdown Voltage (kV) | Color |
|-----------------|------------|---------------------------|-------|
| 13357 | 35 | 7.5 | Brown |
| 14401 | 35 | 10 | Black |
| 14355 | 10 | 10 | Black |

| Support Sleeves Part No. | Feed Angle | RF Breakdown Voltage (kV) | Color | Max Outer Diameter cm / (in) | Max Inner Diameter cm / (in) | Length cm / (in) |
|--------------------------|------------|---------------------------|-------|------------------------------|------------------------------|------------------|
| 13355 | 90 | 7.5 | Brown | 2.64 (1.04) | .483 (.190) | 14.15 (5.570) |
| 14371 | 90 | 10 | Black | 2.64 (1.04) | .483 (.190) | 14.15 (5.570) |
| 13819 | 90 | 7.5 | Brown | 1.6 (.62) | .500 (.197) | 12.88 (5.070) |
| 14817 | 90 | 10 | Black | 1.6 (.62) | .500 (.197) | 12.88 (5.070) |

LEAD THRU BODIES, GASKET & NUT RING

For PN Information See Chart

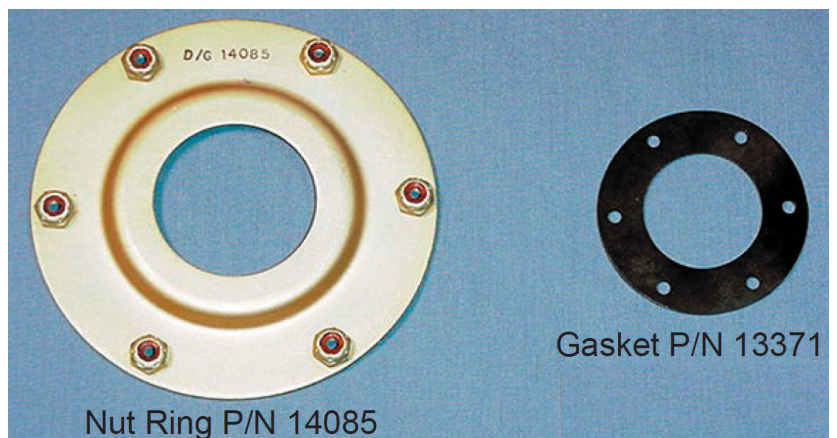

PN 14402,
PN 14217 or
PN 15631

| Part No. | RF Breakdown Voltage (kV) | Feed-thru Cap (pF) | Antenna Wire |
|----------|---------------------------|--------------------|--------------|
| 14217 | 7.5 | 2.5 | 14379 |
| 14402 | 10 | 2.0 | 14379 |
| 15631 | 10 | 2.0 | 14809 |